


STRING WOUND FILTER CARTRIDGES

FWC-LL-WX-ZZZ **New!!**

Applications :

Plating Solutions, Pre RO, Chemicals, Petrochemical Process, Food & Beverage, Electronics

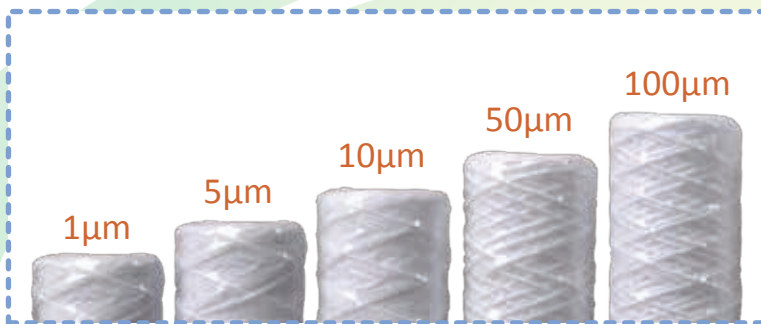


Features & Benefits :

- Continuous strand winding process provides consistent performances of high dirt holding capacity, long service and high flow rate
- Numerous filter media provide excellent chemical compatibility for different applications
- No odor, no foaming and no media migration
- Computer programming capability optimizes the filter cartridge geometrically and maximizes the use of surface area

Specifications :

Filter Media	Polypropylene, Bleached Cotton
Filter Length	10", 20", 30", 40"
Micron Ratings	1, 5, 10, 25, 50, 100µm
Core Material	Polypropylene
Inside Diameter	1.1" (28mm)
Outside Diameter	2.5" (63mm), 4.5" (114mm)

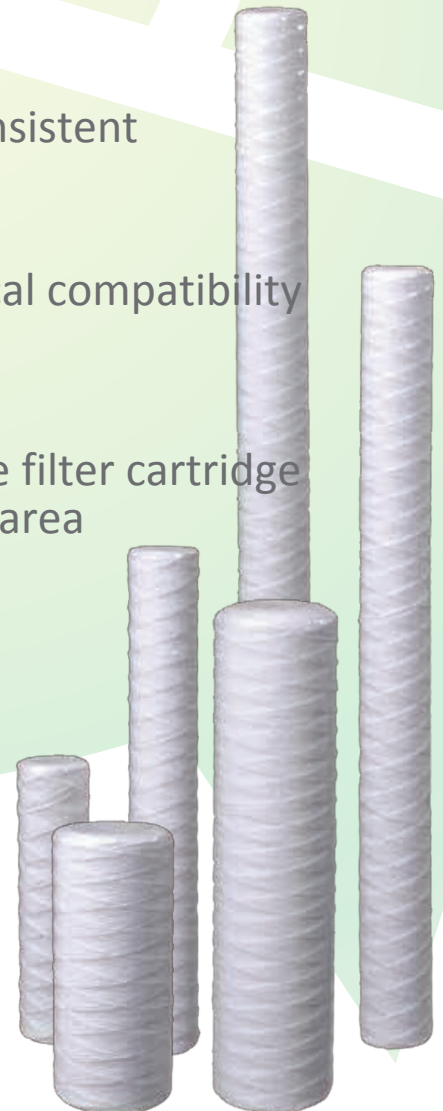

GRANULAR ACTIVATED CARBON PLUS KDF FILTER

New!! BFCKDF-10 /20

Durable Multifunction filter for water treatment

Coconut Shell Activated Carbon -

Designed to remove chlorine, odor and bad taste.

KDF 55 Media -

Removes chlorine, heavy metals and kills bacteria.



Features & Benefits :

- Coconut Shell Activated Carbon with NSF-61 Certification
- KDF 55 Medium with NSF-42 Certification
- Excellent Flow Rate
- High Capacity Dual function filter cartridge with excellent chlorine, taste, odor, bacteria and heavy metal reduction

Carbon + KDF

WARNING : Do not use with water that is micro-biologically unsafe or of unknown quality, without adequate disinfection before or after the system.

NOTE : This cartridge may contain carbon fines (very fine black powder). After installation and before using the water, follow the instructions for flushing the cartridge to remove fines.

NOTE : It is recommended that you flush for 20 seconds prior to using the water for drinking or cooking purposes.

NOTE : Chlorine reduction capacity is estimated with 2.0ppm free available chlorine (FAC) at continuous flow rate at greater than 75% reduction.

Specifications :

	BFCKDF-10	BFCKDF-20
Filter O. D.	4.5"	4.5"
Filter Length	10"	20"
Max Temperature	40~125°F (4.4~51.7°C)	
Chlorine Reduction @ Flow Rate	Above 47,000L @ 7.6 Lpm (Based on manufacturers internal testing)	
Media	Coconut Shell Activated Carbon , KDF 55 Medium	

WATER FILTER CARTRIDGES

GAC Filter



New!!

New!!

FPP-GAC-14 F-GAC-05 F-GAC-14-UDFS F-GAC-14-UDFS Ribbed F-GAC-14 F-GAC-14-UDF F-GAC-20-UDF

FILTER SERIES

CTO Filter and GAC Filter



F-CTO-05 F-CTO-10 F-CTO-B10 F-BFC-10 F-BFC-20

Resin Filter




New!!

F-REN-14 F-REN-14-UDF F-REN-14 F-REN-14 F-REN-20

WATER FILTER CARTRIDGES

K-33 Type, T-33 Type

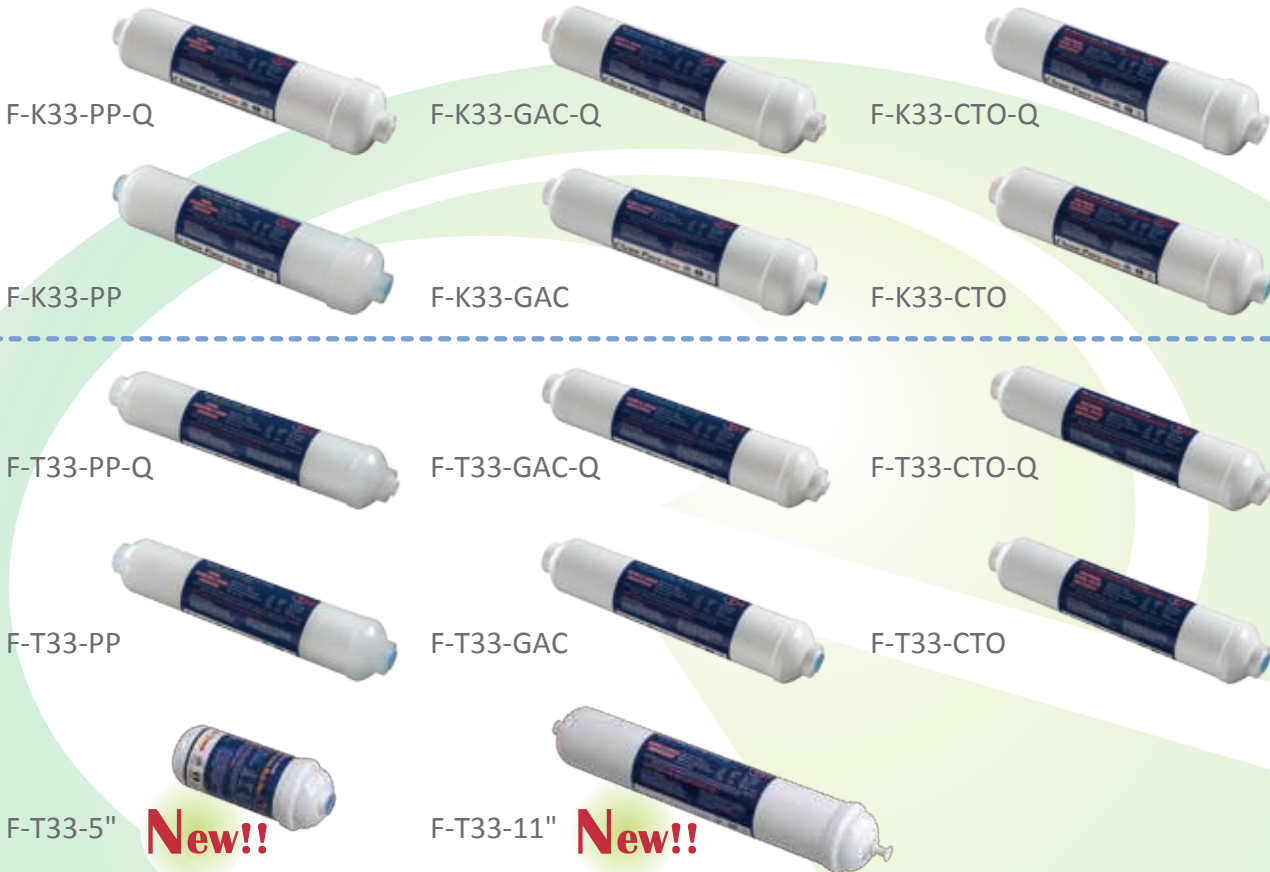

FILTER SERIES

K-33 Type Resin Filters, T-Bio Type Filters, T-33 Mineral Filters



RO MEMBRANE HOUSING

FILTER SERIES



New!!

RO3-001W
300GPD



RO1-ST001W
Quick



RO-Q0001W
Quick



RO1-0001W
Smooth



RO-0001W
Striped



New!!

Z-UDF-CG-A



XG-003C



Z-T33-C-A



Z-T33-Y-A



Z-T33-W-A



Z-FF001-1

FIBI GREEN